


# HS-AM Magnets - Flat Face







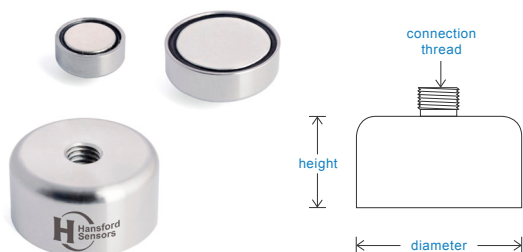




We manufacture a range of accessories for use with our comprehensive series of industrial accelerometers to achieve a secure surface fit.

Flat Face Pot Magnets provide a secure, semi-permanent point of connection to a flat surface and all have a constant operating temperature range up to 120°C.

Part No.	Diameter	Thread	Pull Strength	Height	
HS-AM027	20mm	1/4"-28 UNF Male	12kg	8mm	
HS-AM028	20mm	M6 Male	12kg	8mm	
HS-AM029	20mm	M8 Male	12kg	8mm	
HS-AM030	20mm	10-32 UNF Male	12kg	8mm	
HS-AM009	25mm	1/4"-28 UNF Male	13.5kg	8mm	
HS-AM006	25mm	M6 Male	13.5kg	8mm	
HS-AM007	25mm	M8 Male	13.5kg	8mm	
HS-AM024	25mm	10-32 UNF Male	13.5kg	8mm	
HS-AM008	25mm	Q-Fit Male	13.5kg	14mm	
HS-AM014	25mm	1/4"-28 UNF Female	13.5kg	15mm	
HS-AM015	25mm	M5 Female	13.5kg	15mm	

# HS-AM Magnets - Flat Face

Part No.	Diameter	Thread	Pull Strength	Height	
HS-AM016	25mm	M6 Female	13.5kg	15mm	
HS-AM017	25mm	M8 Female	13.5kg	15mm	
HS-AM031	30mm	1/4"-28 UNF Male	25kg	10mm	
HS-AM032	30mm	M6 Male	25kg	10mm	
HS-AM033	30mm	M8 Male	25kg	10mm	
HS-AM034	30mm	10-32 UNF Male	25kg	10mm	
HS-AM045	30mm	1/4"-28 UNF Female	25kg	16mm	
HS-AM046	30mm	M6 Female	25kg	16mm	
HS-AM047	30mm	M8 Female	25kg	16mm	
HS-AM019	40mm	1/4"-28 UNF Male	50kg	9mm	