


HS-CEI Connection Enclosure

Stainless Steel - with safety barriers

Key Features

- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

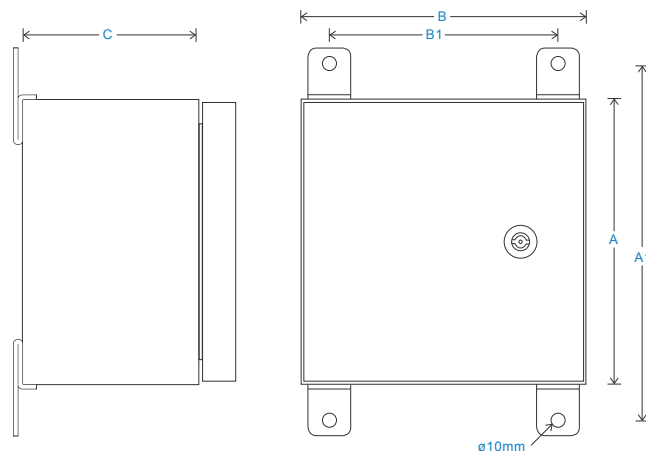

dimensions to be specified in 'how to order' table

Technical Performance

Inputs	Via accelerometer	Glanding	Glands supplied but not fitted
Output	BNC as standard (alternatives can be specified in 'How To Order' table)		Holes are punched for:
Mounting Board	Engraved traffolyte panel (customisable upon request)	Single input M12 - ø3.5-7mm cable	
Material	304 Stainless Steel (to be specified in options of 'How To Order' table)	Multi input M20 - ø7-13mm multi-core cable	
Dimensions	see: 'How To Order' table	Channel locations - other	
Sealing	IP66	labelling available upon request	
Termination	Klippon Type	supplied are 4 x Brackets	
Door	Lock and polyamide key	Safety Barrier	MTL 7728 Zener Barrier (BAS01ATEX7217) M06-027-B
		EMC	EN61326-1:2013

How To Order

