


HS-SESSMMO Switching Enclosure

Stainless Steel - with outputs for online expansion


Key Features

- Continuous BNC and 2 Pin MS connector
- Multiple Outputs via one connector
- Terminals for online expansion
- Provides a terminal to take readings from accelerometers via a portable data-collector


6 Way

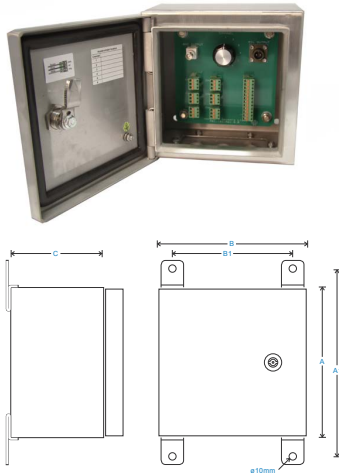

12 Way

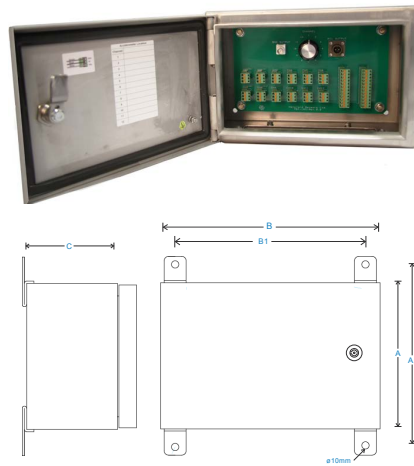

16 Way

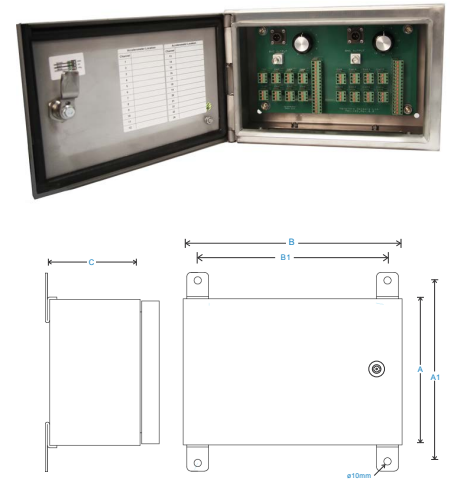

Technical Performance

| | | | |
|----------------|------------------------------|-----------|--|
| Inputs | Via accelerometer | Door | Lock and polyamide key |
| Output | BNC and 2 Pin MS as standard | Glanding | Glands supplied but not fitted Holes are punched for: Single input M12 - ø3.5-7mm cable Single input M20 - ø7-13mm multi-core cable Multi input M20 - 3 x ø5.3mm |
| Mounting Board | PCB Panel | Labelling | Channel locations - other labelling available upon request supplied are 4 x Brackets |
| Material | 304 Stainless Steel | Mounting | |
| Termination | Quick-release terminal | EMC | EN61326-1:2013 |
| Dimensions | see: 'How To Order' table | | |
| Sealing | IP66 | | |

How To Order

