


HS-SE-TX-PC Switching Enclosure

Polycarbonate Enclosure for use with Triaxial

Key Features

- Provides a terminal to take readings from Triaxial accelerometers via a portable data-collector
- Multiple outputs via M12 connector

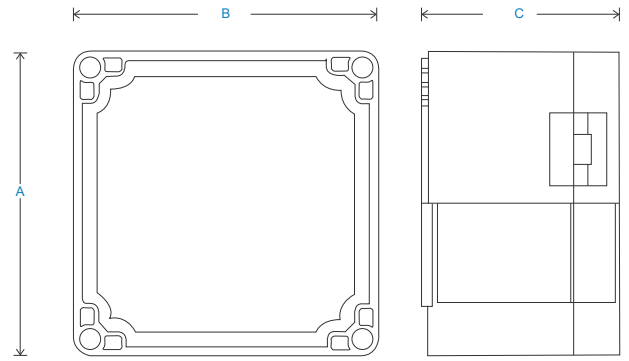

Technical Performance

Inputs	Via accelerometer	Glanding	Glands supplied but not fitted
Output	M12		Holes are punched for:
Mounting Board	Engraved traaffolyte panel (customisable upon request)		Single input M12 - \varnothing 3.5-7mm cable
Material	Polycarbonate		Single input M20 - \varnothing 7-13mm multi-core cable
Dimensions	see: 'How To Order' table	Labelling	Multi input M20 - 3 x \varnothing 5.3mm
Sealing	IP66		Channel locations - other labelling available upon request
Termination	Din rail terminals wired to switch	Mounting	supplied are 4 x Brackets
Door	Catches	EMC	EN61326-1:2013

How To Order

